

LED_Linear family	IP65	Ik05			T _a 25					
-------------------	------	------	--	--	-------------------	--	--	--	--	--



RAINBOW A RELIABLE AND COST-EFFECTIVE LED LIGHTING FIXTURE DESIGN FOR DYNAMIC COLOR CHANGING OR MONO COLOR LIGHTING EFFECTIVE.

Technical description

Rainbow Tube is ideal for exterior accent and contour lighting applications, as well as for low-resolution graphics with a resolution of up to 125 mm per pixel. Up to 20 fixtures can be connected in two linear runs of 20 m per control module. Ethernet as well as standard SPI control make this product easy to use with standard SPI controller. Body material is polycarbonate, Uniform beam of light at 180° viewing angle and color temperature is RGB or mono-color with up to 20 m resolution. Chromaticity tolerance (initial MacAdam: 3). Color rendering Ra > 80.



Dimensions: 1500 x 34 x 41 mm
 Total power: 7 w/m (Dimmable with SPI controller)
 Luminaire luminous flux: 189 lm/m
 Luminaire efficacy: 27 lm/w

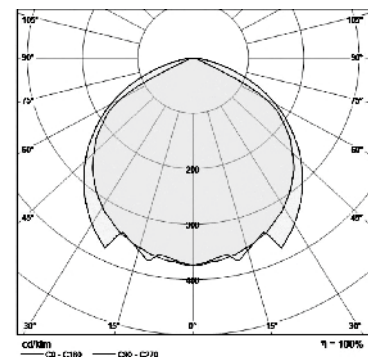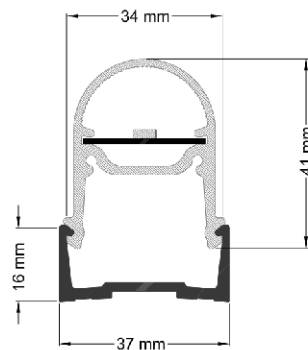

Application

- Decorative
- Up light sign
- Landscape lighting

Correlated color temperature: 6000 kelvin
 Rated median useful life: 50000h L70 at 25°C
 Luminaire input power: 7 w/m

Mounting and installation

Installation with stainless steel accessories (to be order separately).

Options:

