

**SEPEHR NARROW
12PL101002**


AREND

| | | | | | | | | | | |
|-------------------|------|------|--|--|-------------------|--|--|--|--|--|
| LED_Linear family | IP44 | IK05 | | | T _a 25 | | | | | |
|-------------------|------|------|--|--|-------------------|--|--|--|--|--|



THE FAMILY OF RECESSED MOUNT (CEILING & WALL) BACK LIGHT LED LINEAR OPERATING AT 24W 220-240 VAC INPUT. DELIVERING OUTSTANDING PERFORMANCE OF 2400LM.

Technical description

Recessed linear system of small dimensions, suitable both for decorative lighting and for grazing light, made of an aluminium anodized profile in matte white finish and a polycarbonate diffuser (or PMMA diffuser), which provide a continuous and homogeneous light line. Colour temperature is 4000 K (natural with) . Class I electrical and IP44 (IP54 just for option) with plug and play connector. Total power: 15 w/m (slave Luminaires for DALI control an option only) with LED converter. Colour rendering index: Ra > 80. Chromaticity tolerance between multiple luminaires of up to 3 MacAdam ellipses.



Dimensions: 1600 x 47 x 40 mm
 Total power: 24 w
 Luminaire luminous flux: 2400 lm
 Luminaire efficacy: 100 lm/w
 Weight: 1.41 kg

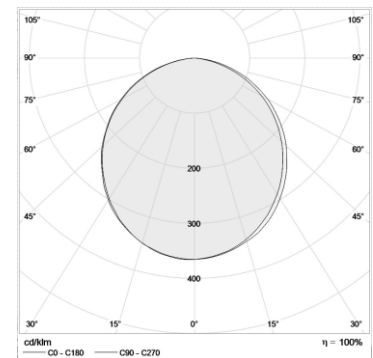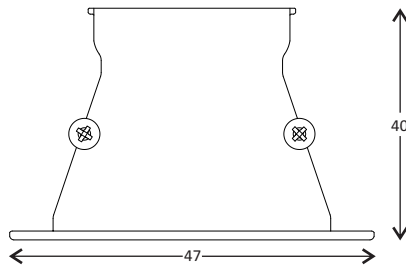

Application

- Office
- Bank
- Hospitality
- House

Correlated color temperature: 4000 kelvin
 Rated median useful life: 50000h L70 at 25°C
 Luminaire input power: 24 w

Mounting and installation

Recessed(ceiling and wall) using spring bracket. Cut-out diameters: 35 mm

Options:

