

**SEPEHR NARROW  
12PL101008**


**AREND**

LED_Linear family	IP44	IK05			T <sub>a</sub> 25					
-------------------	------	------	--	--	-------------------	--	--	--	--	--



**THE FAMILY OF RECESSED MOUNT (CEILING & WALL) BACK LIGHT LED LINEAR OPERATING AT 12W 220-240 VAC INPUT. DELIVERING OUTSTANDING PERFORMANCE OF 1200LM.**

**Technical description**

Recessed linear system of small dimensions, suitable both for decorative lighting and for grazing light, made of an aluminium anodized profile in matte white finish and a polycarbonate diffuser (or PMMA diffuser), which provide a continuous and homogeneous light line. Colour temperature is 4000 K (natural with) . Class I electrical and IP44 (IP54 just for option) with plug and play connector. Total power: 15 w/m (slave Luminaires for DALI control an option only) with LED converter. Colour rendering index: Ra > 80. Chromaticity tolerance between multiple luminaires of up to 3 MacAdam ellipses.



Dimensions: 800 x 47 x 40 mm  
 Total power: 12 w  
 Luminaire luminous flux: 1200 lm  
 Luminaire efficacy: 100 lm/w  
 Weight: 0.66 kg

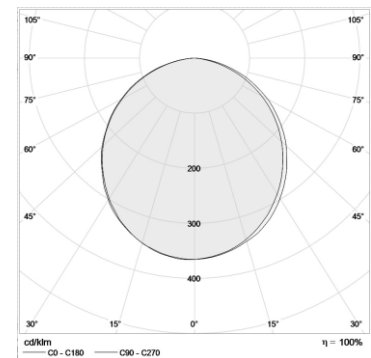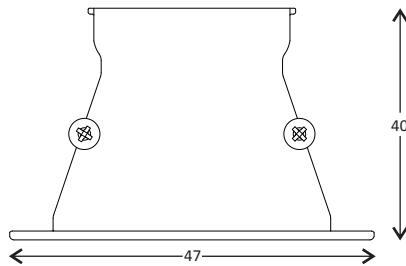

**Application**

- Office
- Bank
- Hospitality
- House

Correlated color temperature: 4000 kelvin  
 Rated median useful life: 50000h L70 at 25°C  
 Luminaire input power: 12 w

**Mounting and installation**

Recessed(ceiling and wall) using spring bracket. Cut-out diameters: 35 mm

Options:

