

|                   |      |      |     |   |                   |   |   |   |   |  |
|-------------------|------|------|-----|---|-------------------|---|---|---|---|--|
| LED_Linear family | IP44 | IK05 | LED | ⊕ | T <sub>a</sub> 25 | 5 | 🔊 | 📐 | 📐 |  |
|-------------------|------|------|-----|---|-------------------|---|---|---|---|--|



THE FAMILY OF SURFACE MOUNT, RECESSED AND PENDANT LINEAR OPERATING AT 32W, 220-240 VAC INPUT. DELIVERING OUTSTANDING PERFORMANCE OF 3200LM.

**Technical description**

Luminaire for indoor architectural and pendant linear lighting, a surface LED luminaire, flat direct LED with PS diffuser and body: extruded anodize aluminum (powder coating an option) plug and play connector to make the installation and wiring easy. Class I electrical, IP44 (IP54 only for option). Total power: 20 w/m, slave luminaire for DALI control (an option only) with LED converter. LED color temperature is 3000 kelvin (warm white). Chromaticity tolerance (initial MacAdam: 3). Color rendering Ra> 80.



Dimensions: 1600 x 40 x 85 mm  
Total power: 32 w  
Luminaire luminous flux: 3200 lm  
Luminaire efficacy: 100 lm/w  
Weight: 3.4 kg

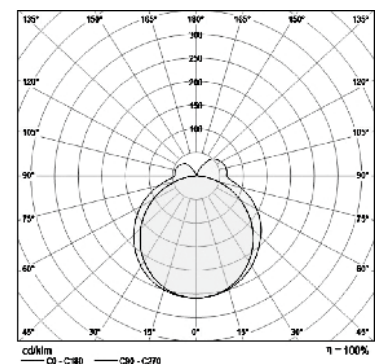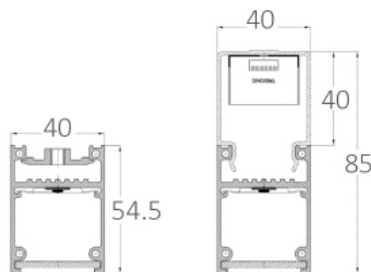

**Application**

- Shopping mall
- Exhibition hall
- Food court
- Decorative
- Fashion

Correlated color temperature: 3000 kelvin  
Rated median useful life: 50000h L70 at 25°C  
Luminaire input power: 32 w

**Mounting and installation**

Surface-mounted and pendant (ceiling) using accessories to be ordered separately. Plug and play connection to make the installation and wiring easy.

Options:

