

LED_Linear family	IP44	IK05			T <sub>a</sub> 25						
-------------------	------	------	--	--	-------------------	--	--	--	--	--	--



THE FAMILY OF SURFACE MOUNT, RECESSED AND PENDANT LINEAR OPERATING AT 24W, 220-240 VAC INPUT. DELIVERING OUTSTANDING PERFORMANCE OF 2400LM.

**Technical description**

Luminaire for indoor architectural and pendant linear lighting, a surface LED luminaire, flat direct LED with PS diffuser and body: extruded anodize aluminum (powder coating an option) plug and play connector to make the installation and wiring easy. Class I electrical, IP44 (IP54 only for option). Total power: 20 w/m, slave luminaire for DALI control (an option only) with LED converter. LED color temperature is 4000 kelvin (natural white). Chromaticity tolerance (initial MacAdam: 3). Color rendering Ra> 80.



Dimensions: 1200 x 40 x 85 mm  
Total power: 24 w  
Luminaire luminous flux: 2400 lm  
Luminaire efficacy: 100 lm/w  
Weight: 2.6 kg

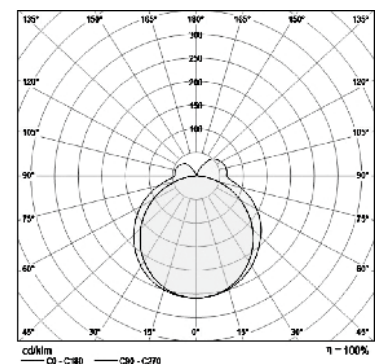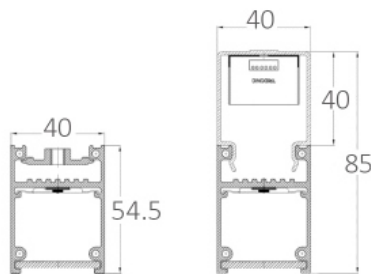

**Application**

- Shopping mall
- Exhibition hall
- Food court
- Decorative
- Fashion

Correlated color temperature: 4000 kelvin  
Rated median useful life: 50000h L70 at 25°C  
Luminaire input power: 24 w

**Mounting and installation**

Surface-mounted and pendant (ceiling) using accessories to be ordered separately. Plug and play connection to make the installation and wiring easy.

Options:

