

LED_Linear family	IP44	IK05	LED	⊕	T _a 25	5	🔊	📐	📐	
-------------------	------	------	-----	---	-------------------	---	---	---	---	--



THE FAMILY OF SURFACE MOUNT, RECESSED AND PENDANT LINEAR OPERATING AT 32W, 220-240 VAC INPUT. DELIVERING OUTSTANDING PERFORMANCE OF 3200LM.

Technical description

Luminaire for indoor architectural and pendant linear lighting, a surface LED luminaire, flat direct LED with PS diffuser and body: extruded anodize aluminum (powder coating an option) plug and play connector to make the installation and wiring easy. Class I electrical, IP44 (IP54 only for option). Total power: 20 w/m, slave luminaire for DALI control (an option only) with LED converter. LED color temperature is 6000 kelvin (cool white). Chromaticity tolerance (initial MacAdam: 3). Color rendering Ra> 80.



Dimensions: 1200 x 40 x 85 mm
Total power: 24 w
Luminaire luminous flux: 2400 lm
Luminaire efficacy: 100 lm/w
Weight: 2.6 kg

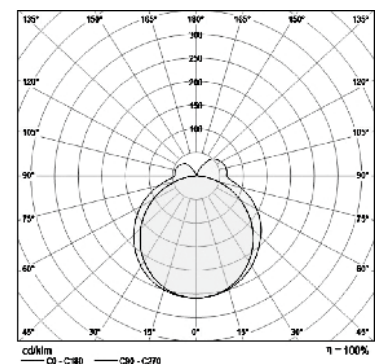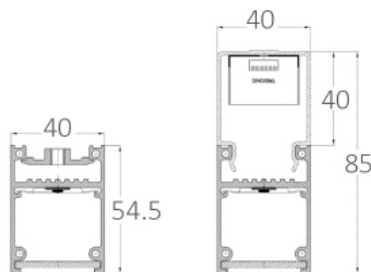

Application

- Shopping mall
- Exhibition hall
- Food court
- Decorative
- Fashion

Correlated color temperature: 6000 kelvin
Rated median useful life: 50000h L70 at 25°C
Luminaire input power: 24 w

Mounting and installation

Surface-mounted and pendant (ceiling) using accessories to be ordered separately. Plug and play connection to make the installation and wiring easy.

Options:

