

LED_Linear family	IP44	IK05			T _a 25					
-------------------	------	------	--	--	-------------------	--	--	--	--	--



THE FAMILY OF RECESSED, SURFACE MOUNT EDGE LIGHT LED LINEAR OPERATING AT 40W 220-240 VAC INPUT. DELIVERING OUTSTANDING PERFORMANCE OF 2800LM.

Technical description

A recessed, surface, suspended LED luminaire with a slim 30mm profile. Electronic class I electrical, IP44 (IP54 only for option), IK05. Body: extruded powder coating (anodized option) aluminum. This is the very unique edge light LED panel with highly uniform distribution for special ceiling. Total power: 25 w/m, Diffuser: PMMA. Color rendering Ra>80, choice of color temperature: 6000 kelvin (cool white). Chromaticity tolerance (initial MacAdam): 3. Suitable for ALUCOD ceiling.



Dimensions: 1600 x 150 x 30 mm
Total power: 40 w
Luminaire luminous flux: 2800 lm
Luminaire efficacy: 70 lm/w
Weight: 3.5 kg

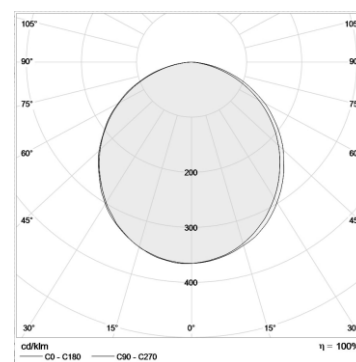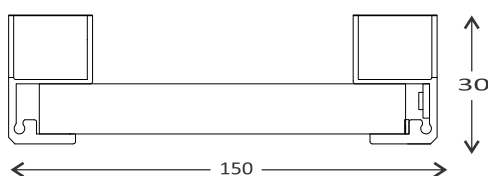

Application

- ALUCOD ceiling
- Shopping mall
- Exhibition mall

Correlated color temperature: 6000 kelvin
Rated median useful life: 50000h L70 at 25°C
Luminaire input power: 40 w

Mounting and installation

Surface mounted (ceiling) using accessories to be ordered separately.

Options:

