MAXIM MID
12PL502006

AREND

LED_Linear family	IP44	IK05			T_a25					

THE FAMILY OF RECESSED, SURFACE MOUNT EDGE LIGHT LED LINEAR OPERATING AT 30W 220-240 VAC INPUT. DELIVERING OUT STANDING PERFORMANCE OF 2100LM.

Technical description

A recessed, surface, suspended LED luminaire with a slim 30mm profile. Electronic class I electrical, IP44 (IP54 only for option),IK05. Body: extruded powder coating (anodized option) aluminum. This is the very unique edge light LED panel with highly uniform distribution for special ceiling. Total power: 25 w/m, Diffuser: PMMA. Color rendering Ra>80, choice of color temperature: 6000 kelvin (cool white). Chromaticity tolerance (initial MacAdam): 3. Suitable for ALUCOD ceiling.

Dimensions: 1200 x 150 x 30 mm
Total power: 30 w
Luminaire luminous flux: 2100 lm
Luminaire efficacy: 70 lm/w
Weight: 2.5 kg

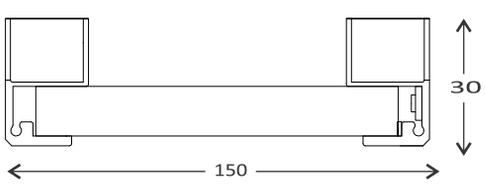

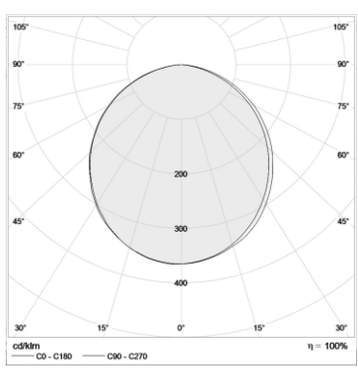

Application

- ALUCOD ceiling
- Shopping mall
- Exhibition mall

Correlated color temperature: 6000 kelvin
Rated median useful life: 50000h L70 at 25°C
Luminaire input power: 30 w

Mounting and installation

Surface mounted (ceiling) using accessories to be ordered separately.

Options: