

LED_Linear family	IP44	IK05	LED	⊥	T <sub>a</sub> 25	5	🔊	⏏	⏏	⏏	⏏
-------------------	------	------	-----	---	-------------------	---	---	---	---	---	---



THE FAMILY OF RECESSED, SURFACE MOUNT EDGE LIGHT LED LINEAR OPERATING AT 18W 220-240 VAC INPUT. DELIVERING OUTSTANDING PERFORMANCE OF 1260LM.

**Technical description**

A recessed, surface, suspended LED luminaire with a slim 30mm profile. Electronic class I electrical, IP44 (IP54 only for option), IK05. Body: extruded powder coating (anodized option) aluminum. This is the very unique edge light LED panel with highly uniform distribution for special ceiling. Total power: 15 w/m, Diffuser: PMMA. Color rendering Ra>80, choice of color temperature: 4000 kelvin (natural white). Chromaticity tolerance (initial MacAdam): 3. Suitable for ALUCOD ceiling.



Dimensions: 1200 x 100 x 30 mm  
Total power: 18 w  
Luminaire luminous flux: 1260 lm  
Luminaire efficacy: 70 lm/w  
Weight: 1.5 kg

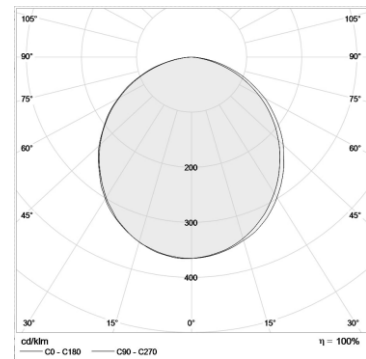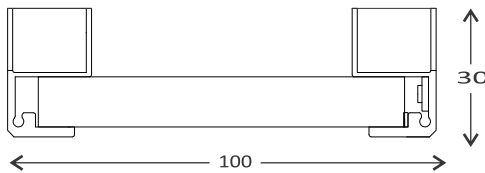

**Application**

- ALUCOD ceiling
- Shopping mall
- Exhibition mall

Correlated color temperature: 4000 kelvin  
Rated median useful life: 50000h L70 at 25°C  
Luminaire input power: 18 w

**Mounting and installation**

Surface mounted (ceiling) using accessories to be ordered separately.

Options:

