

| | | | | | | | | | | |
|-------------------|------|------|--|--|-------------------|--|--|--|--|--|
| LED_Linear family | IP44 | IK05 | | | T _a 25 | | | | | |
|-------------------|------|------|--|--|-------------------|--|--|--|--|--|



THE FAMILY OF SURFACE MOUNT LED LINEAR OPERATING AT 19.2W, 24 VDC INPUT. DELIVERING OUT STANDING PERFORMANCE OF 2304LM.

Technical description

Luminaire for indoor architectural linear lighting and outdoor for landscape lighting (With IP65). LED color temperature is 4000 kelvin (natural white), Flat direct LED with PMMA diffuser and body is extruded anodize aluminum (powder coating an option). IP44 (IP54 and above only for option). Total power: 12 w/m, 24 Constant voltage dimmable types driver can be used for dimming. Chromaticity tolerance (initial MacAdam: 3). Color rendering Ra>80.



Dimensions: 1600 x 17 x 15 mm
 Total power: 19.2 w
 Luminaire luminous flux: 2304 lm
 Luminaire efficacy: 120 lm/w
 Weight: 1 kg

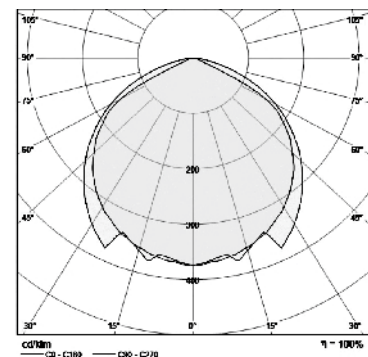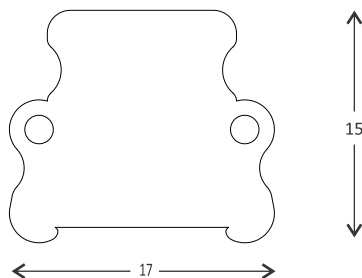

Application

- Strechceiling
- Shopping mall
- Hide light
- Office

Correlated color temperature: 4000 kelvin
 Rated median useful life: 50000h L70 at 25°C
 Luminaire input power: 19.2 w

Mounting and installation

Installation with stainless steel accessories (to be order separately).

Options:

