

LED_Linear family	IP44	IK05			T <sub>a</sub> 25					
-------------------	------	------	--	--	-------------------	--	--	--	--	--



THE FAMILY OF SURFACE MOUNT LED LINEAR OPERATING AT 9.6W, 24 VDC INPUT. DELIVERING OUT STANDING PERFORMANCE OF 1152LM.

**Technical description**

Luminaire for indoor architectural linear lighting and outdoor for landscape lighting (With IP65). LED color temperature is 3000 kelvin (warm white), Flat direct LED with PMMA diffuser and body is extruded anodize aluminum (powder coating an option). IP44 (IP54 and above only for option). Total power: 12 w/m, 24 Constant voltage dimmable types driver can be used for dimming. Chromaticity tolerance (initial MacAdam: 3). Color rendering Ra>80.



Dimensions: 800 x 17 x 15 mm  
 Total power: 9.6 w  
 Luminaire luminous flux: 1152 lm  
 Luminaire efficacy: 120 lm/w  
 Weight: 0.4 kg

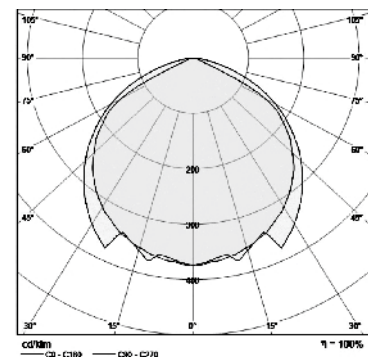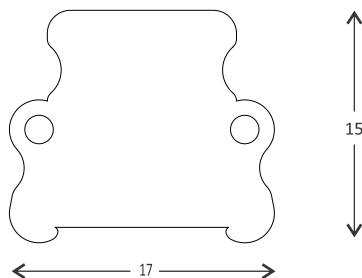

**Application**

- Strechceiling
- Shopping mall
- Hide light
- Office

Correlated color temperature: 3000 kelvin  
 Rated median useful life: 50000h L70 at 25°C  
 Luminaire input power: 9.6 w

**Mounting and installation**

Installation with stainless steel accessories (to be order separately).

Options:

