

LED_Linear family	IP44	IK05			T <sub>a</sub> 25					
-------------------	------	------	--	--	-------------------	--	--	--	--	--



THE FAMILY OF RECESSED AND SURFACE MOUNT LED LINEAR OPERATING AT 14.4W, 24 VDC INPUT. DELIVERING OUTSTANDING PERFORMANCE OF 432LM.

**Technical description**

Luminaire for indoor and outdoor architectural linear lighting, with LEDs color temperature is 3000 kelvin (warm white). Flat direct LED with PMMA diffuser and body is extruded anodize aluminum (powder coating an option). Total power is 12 w/m. IP44 (IP54 and above only for option). The product is supplied with a cable of L= 80 mm with IP67 male and female connectors fitted with an anti detachment locknut on both ends (not the head). Easy to install and a robust design for difficult environments. 24 Volt DC dimmable driver for dimming. Chromaticity tolerance (initial MacAdam: 3). Color rendering Ra>



Dimensions: 1200 x 19 x 24 mm  
 Total power: 14.4 w  
 Luminaire luminous flux: 432 lm  
 Luminaire efficacy: 30 lm/w  
 Weight: 0.8 kg

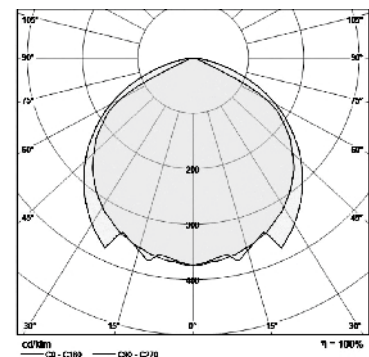

**Application**

- Under stairs
- Up light sign

Correlated color temperature: 3000 kelvin  
 Rated median useful life: 50000h L70 at 25°C  
 Luminaire input power: 14.4 w

**Mounting and installation**

Installation with stainless steel accessories (to be order separately).

Options:

