

LED_Linear family	IP44	IK05			T _a 25					
-------------------	------	------	--	--	-------------------	--	--	--	--	--



THE FAMILY OF RECESSED AND SURFACE MOUNT LED LINEAR OPERATING AT 9.6W, 24 VDC INPUT. DELIVERING OUTSTANDING PERFORMANCE OF 288LM.

Technical description

Luminaire for indoor and outdoor architectural linear lighting, with LEDs color temperature is 6000 kelvin (cool white). Flat direct LED with PMMA diffuser and body is extruded anodize aluminum (powder coating an option). Total power is 12 w/m. IP44 (IP54 and above only for option). The product is supplied with a cable of L= 80 mm with IP67 male and female connectors fitted with an anti detachment locknut on both ends (not the head). Easy to install and a robust design for difficult environments. 24 Volt DC dimmable driver for dimming. Chromaticity tolerance (initial MacAdam: 3). Color rendering Ra>



Dimensions: 800 x 19 x 24 mm
 Total power: 9.6 w
 Luminaire luminous flux: 288 lm
 Luminaire efficacy: 30 lm/w
 Weight: 0.4 kg

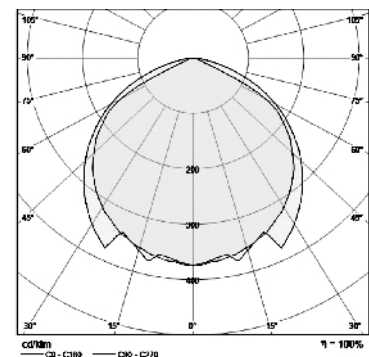

Application

- Under stairs
- Up light sign

Correlated color temperature: 6000 kelvin
 Rated median useful life: 50000h L70 at 25°C
 Luminaire input power: 9.6 w

Mounting and installation

Installation with stainless steel accessories (to be order separately).

Options:

