


LED_Linear family	IP44	IK05			T _a 25					
-------------------	------	------	--	--	-------------------	--	--	--	--	--



THE FAMILY OF DECORATIVE RECESSED LED LINEAR OPERATING AT 12W, 24 VDC INPUT. DELIVERING OUT STANDING PERFORMANCE OF 360LM.

Technical description

A way finding decorative recessed wall and ceiling LED Luminaries. This is completely designed with PMMA, to gives a very pure and uniform pattern without glaring to have a good feeling. IP65, Ik07. Total power: 12 w/m, warm white LEDs (3000 k) for indoor. All LEDs are within 3 steps Mac Adam ellipse to ensure color consistency .Luminaries length can be changed by project submultiple 10 cm. 24 Volt DC dimmable driver for dimming. Chromaticity tolerance (initial MacAdam: 3). Color rendering Ra>80.



Dimensions: 1000 x 48 x 36 mm
 Total power: 12 w
 Luminaire luminous flux: 360 lm
 Luminaire efficacy: 30 lm/w
 Weight: 1.7 kg

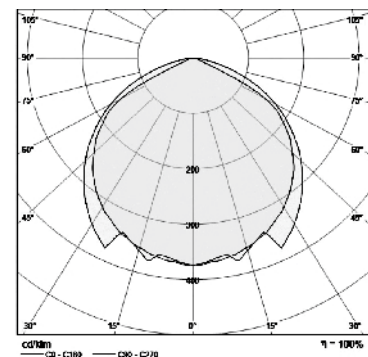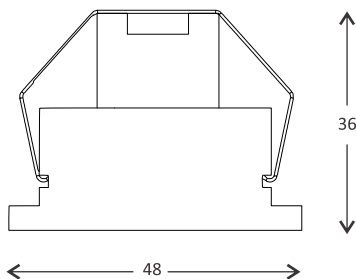

Application

- Decorative
- Up light sign
- Finding way

Correlated color temperature: 3000 kelvin
 Rated median useful life: 50000h L70 at 25°C
 Luminaire input power: 12 w

Mounting and installation

Installation with stainless steel accessories (to be order separately).

Options:

