



BARDIA NARROW

THE FAMILY OF SURFACE MOUNT AND PENDANT LED LINEAR LIGHT



BARDIA NARROW

AREND
INVESTING IN LIGHT

LED_Linear family	IP44	IK05	LED	±	T _a 25	5	⚡	↕	↔	⌂	
-------------------	------	------	-----	---	-------------------	---	---	---	---	---	--

THE FAMILY OF RECESSED MOUNT TRIMLESS LINEAR OPERATING AT 20 W/M, 220-240 VAC INPUT. DELIVERING OUT STANDING PERFORMANCE OF 2000LM/M.

Technical description


Recesses mount and trimless of linear system for indoor general lighting. The lumenline is a linear system of LED luminaires which can be integrated in most ceiling types to provide a discreet flexible general lighting solution for commercial and institutional environments such as offices and class rooms. Color temperature is 3000 - 6000 kelvin . A LED Luminaires, flat direct LED with the top of the optical polystyrene diffuser screen and extruded powder coating hard anodizing aluminum body, with aluminum end caps complete with silicone seals. Symmetric optic. Class I electrical and IP44 (IP54 just for option) with plug and play connector. Total power: 20 w/m, slave luminaire for DALI control (an option only) with LED converter. Chromaticity tolerance (initial MacAdam: 3). Color rendering Ra>80.

product can be produced in 60, 120 , 160, 180 and 220 mm.




Application

- Corridors
- Office
- General
- Parking

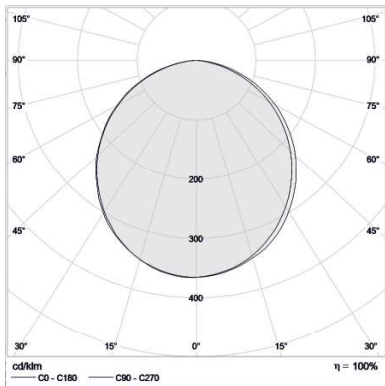

Correlated color temperature: 3000 - 6000 kelvin
 Rated median useful life: 50000h L70 at 25°C Luminaire
 input power: 20 w/m

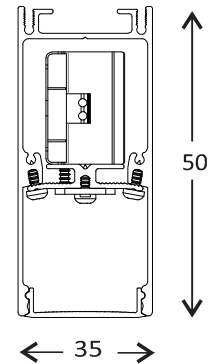

Dimensions: 1200 x 35 x 50mm
 Total power: 24w
 Luminaire luminous flux: 2000 lm
 Luminaire efficacy: 100 lm/w
 Weight: 1 kg

Mounting and installation

Surface mount using the accessories to be ordered separately. **Cut-out diameters: 39 mm.**

Options:

