


LED_Industrial family	-	-	LED	DALI	T _a 25	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100
-----------------------	---	---	-----	------	-------------------	---	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	-----



THE FAMILY OF PENDANT, DECORATIVE HIGH BAY OPERATING AT 65W, 220-240 VAC INPUT. DELIVERING OUT STANDING PERFORMANCE OF 5000LM.

Technical description

Suspended general lighting luminaire for indoor mounting. It has a high efficiency, latest generation LED light source and a low-loss technical thermoplastic diffuser. The luminaire reflector is made of spun aluminium, available in different patterns inside as well as outside and in transparent glass. To be used as a dark light dome where needs emotional and sense luxury, the enclosure material is stain steel, and the inside is covered with a thin sheet of gold or silver. Housing material: extorted hard anodizing aluminum body. Total power: 65w, slave luminaire, for DALI control. Luminaire luminous flux: 5000 lm, Luminaire efficacy: 67lm/w. Color rendering Index: 80. color temperature: 4000 kelvin (natural white).

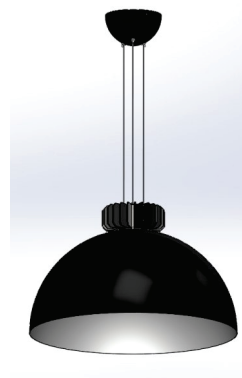

Dimensions: Ø530 x 823 mm
 Total power: 65 w
 Luminaire luminous flux: 5000 lm
 Luminaire efficacy: 67 lm/w
 Weight: 3 kg



Application

- General industry application
- High rack warehouse
- Restaurant
- Decorative

Correlated color temperature: 4000 kelvin
 Rated median useful life: 50000h L70 at 25°C
 Luminaire input power: 65w

Mounting and installation

Pendant the luminaire from the ceiling with special accessories is in the luminaire case.

Options:

