

# DLD 12PDL400102

**AREND**

LED_Downlight family	IP44	-		-	-			45°		
----------------------	------	---	--	---	---	--	--	-----	--	--



**THE FAMILY OF RECESSED MOUNT (CEILING ) LED DOWNLIGHT OPERATING AT 9W 220-240 VAC INPUT. DELIVERING OUT STANDING PERFORMANCE OF 720LM.**

### Technical description

A high quality anti-glare recessed fixed LED downlight, available with the inner baffle in mirror aluminium, champagne gold, black or white, and the outer bezel finish in black or white. Glare control at 27°. Ingress rating of IP44. Light distribution and control is achieved through the choice of 14°, 24°, 35° or 45° beam angles. The installation frame is separate from the fitting, allowing for easy maintenance without damaging the ceiling. Colour rendering index: Ra > 80. Chromaticity tolerance between multiple luminaires of up to 3 MacAdam ellipses.



Dimensions: Ø110 x 200 mm  
 Total power: 9 w  
 Luminaire luminous flux: 720 lm  
 Luminaire efficacy: 80 lm/w  
 Weight: 0.7 kg

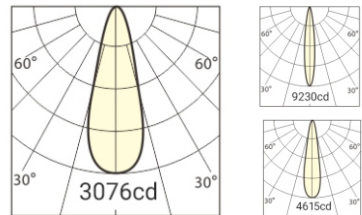

Options:

### Application

- Hotel
- Coffee Shop
- Fashion

Correlated color temperature: 4000 kelvin  
 Rated median useful life: 50000h L70 at 25°C  
 Luminaire input power: 9 w

### Mounting and installation

Recessed(ceiling) using spring bracket. Cut-out diameters: 104 mm

Options:

