

MAGNETAR MINI SPOT
12PSM101001

AREND

LED_Low voltage family	IP20	IK05	LED	⊕	Ta25	5	🔊		6	
------------------------	------	------	-----	---	------	---	---	--	---	--



THE FAMILY OF MAGNETIC TRACK SPOT LIGHT LED OPERATING AT 6W, 48 VDC INPUT. DELIVERING OUT STANDING PERFORMANCE OF 660LM.

Technical description

Magnetic spot 35 luminaire adjustable spotlight with adapter for installation on 48V low voltage track. Integrated «power line» technology allows each spotlight on the track to be adjusted separately. Body material is extruded aluminium and diffuser is PMMA and beam angle is 42° (15°, 24° and 36° just for options). Quick installation system on the track using magnets. Class I electrical, IP20 (IP44 only for option). Total power: 6-10 w. (DALI control an option only). LED color temperature is 3000 kelvin (warm white). Chromaticity tolerance (initial MacAdam: 3). Color rendering Ra>80.



Dimensions: Ø35 x 100 mm
 Total power: 6 w
 Luminaire luminous flux: 660 lm
 Luminaire efficacy: 110 lm/w
 Weight: 0.5 kg

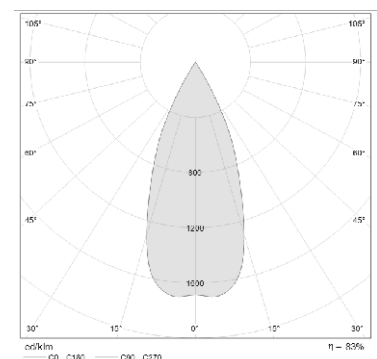

Correlated color temperature: 3000 kelvin
 Rated median useful life: 50000h L70 at 25°C
 Luminaire input power: 6 w

Application

- Decorative
- Art gallery
- Hotel
- Office
- House

Mounting and installation

Quick installation system on the track using magnets.

Options:

