

MAGNETAR MINI SPOT
12PSM101002

AREND

LED_Low voltage family	IP20	IK05	LED	⊕	T _a 25	5	🔊	◀ ▶	6	
------------------------	------	------	-----	---	-------------------	---	---	-----	---	--



THE FAMILY OF MAGNETIC TRACK SPOT LIGHT LED OPERATING AT 6W, 48 VDC INPUT. DELIVERING OUT STANDING PERFORMANCE OF 660LM.

Technical description

Magnetic spot 35 luminaire adjustable spotlight with adapter for installation on 48V low voltage track. Integrated «power line» technology allows each spotlight on the track to be adjusted separately. Body material is extruded aluminium and diffuser is PMMA and beam angle is 42° (15°, 24° and 36° just for options). Quick installation system on the track using magnets. Class I electrical, IP20 (IP44 only for option). Total power: 6-10 w. (DALI control an option only). LED color temperature is 4000 kelvin (natural white). Chromaticity tolerance (initial MacAdam: 3). Color rendering Ra>80.



Dimensions: Ø35 x 100 mm
Total power: 6 w
Luminaire luminous flux: 660 lm
Luminaire efficacy: 110 lm/w
Weight: 0.5 kg

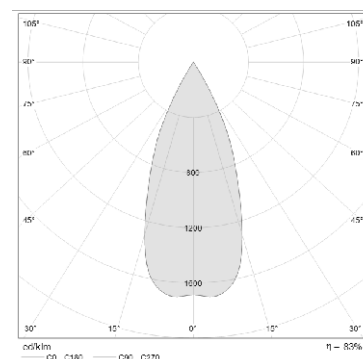

Application

- Decorative
- Art gallery
- Hotel
- Office
- House

Correlated color temperature: 4000 kelvin
Rated median useful life: 50000h L70 at 25°C
Luminaire input power: 6 w

Mounting and installation

Quick installation system on the track using magnets.

Options:

