

LED_Downlight family

IP20

IK03



T_a25

5



THE FAMILY OF PENDANT AND SURFACE MOUNT DOWNLIGHT OPERATING AT 15 W, 220-240 VAC INPUT. DELIVERING OUT STANDING PERFORMANCE OF 1650LM.

Technical description


A pendant and surface mount decorative LED luminaire, to be used as a dark light dome where needs emotional and sense luxury, Body: Extruded Anodized Aluminum (powder coating an option) Reflector made of pure anodized aluminum. Total power: 15 w, slave luminaire for DALI control (an option only) with LED converter. Chromaticity tolerance (initial Macadam: 3). Color rendering Ra > 80, color temperature 3000°- 6000K.

This product can be produced in height 200, 300, 400 and 600 mm.




Application

- Decorative
- Accent light
- Hotel
- Office

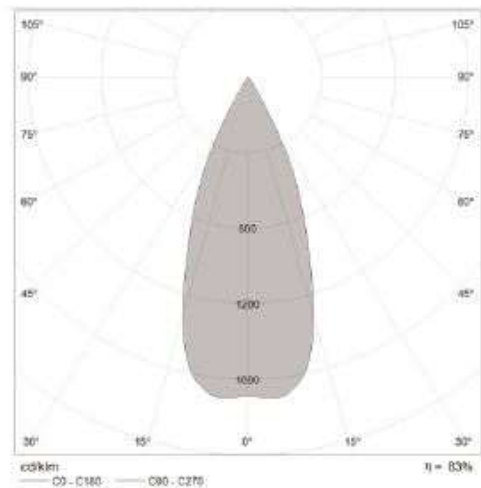

Correlated color temperature: 3000 – 6000 kelvin
 Rated median useful life: 50000h L70 at 25°C Luminaire
 input power: 15 w

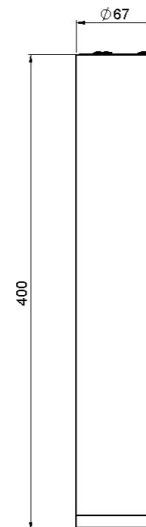

Dimensions: Ø67 x 400 mm
 Total power: 15 w
 Luminaire luminous flux: 1650 lm
 Luminaire efficacy: 110 lm/w
 Weight: 1.4 kg

Mounting and installation

Pendant and surface mount the luminaire from the ceiling with special accessories is in the luminary's case.