


RAHA 65

THE FAMILY OF SURFACE MOUNT DOWNLIGHT



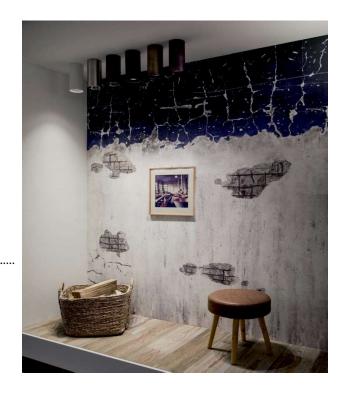

LED_Downlight family		€ LED	-	T _a 25	<i>y</i> 5	•••	A	~	
----------------------	--	----------	---	-------------------	------------	-----	---	---	--

THE FAMILY OF SURFACE MOUNT DOWNLIGHT OPERATING AT 15W, 220-240 VAC INPUT. DELIVERING OUT STANDING PERFORMANCE OF 1650LM.

Technical description


A surface mount decorative LED luminaire, to be used as a dark light dome where needs emotional and sense luxury, Body: Extruded Anodised Aluminium (powder coating an option), Reflector made of pure anodised aluminium. Total power: 15 w, slave luminaire for DALI control (an option only) with LED converter. Chromaticity tolerance (initial MacAdam: 3). Color rendering Ra > 80, color temperature 3000°-6000°K.

This product can be producted in height 100,400 and 600 mm.




Application

- Decorative
- Accent light



Correlated color temperature: 3000 - 6000 kelvin Rated median useful life: 50000h L70 at 25°C Luminaire

input power: 15 w



Dimensions: Ø65 x 100 mm

Total power: 15 w

Luminaire luminous flux: 1650 lm Luminaire efficacy: 110 lm/w

Weight: 0.7 kg

Mounting and installation

Surface mount the luminaire from the ceiling with special accessories is in the luminarie case.

Options:

Body:

















