

Product Family: All IP: 54 IK: 05



THE FAMILY OF RECESSED MOUNT (CEILING & WALL) BACK LIGHT LED LINEAR OPERATING AT 30 W/M 220-240 VAC INPUT. DELIVERING OUT STANDING PERFORMANCE OF 3000 LM/M.

## Technical Description:


Recessed linear system of large dimensions and IP light, suitable for general light, Polycarbonate diffuser, which provide a continues and homogeneous light line. Color temperature is 3000-6000 K .Class I electrical and IP54, with plug and play connector. Total power: 30 w/m (slave Luminaires for DALI control an option only with LED converter). Color rendering index: Ra>80. Chromaticity tolerance between multiple luminaires of up to 3 Macadam ellipses.

This product can be produced in different dimensions


Product Image:



Section View:



Photometric chart:

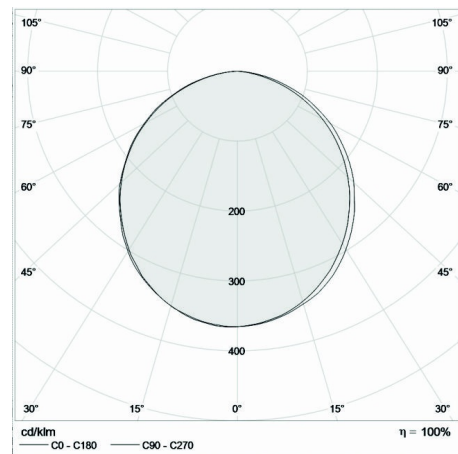

**Correlated color temperature:** 3000-6000 k

**Rated median useful life:** 50000h L70 at 25°C Luminaire

**Luminaire luminous flux:** 3000 lm/m

**Luminaire efficacy:** 100 lm/w

**Dimension:** 1000 x 93 x 83 mm

**Total Power:** 30 w/m

**input Power:** 30 w/m

**Weight:** 0.00

## Application:

- Office
- Bank
- Hospital
- House
- Decorative

## Mounting and installation:

Recessed (ceiling and wall) using spring bracket. Cut-out diameters: 75 mm

