



## MAGNETAR PENDANT 35

THE FAMILY OF MAGNETAR PENDANT LIGHT LED 48VDC INPUT.



# MAGNETAR PENDANT 35

**AREND**  
INVESTING IN LIGHT

LED_Low voltage family	IP43	IK05			T <sub>a</sub> 25	5				
------------------------	------	------	--	--	-------------------	---	--	--	--	--

**THE FAMILY OF MAGNETAR PENDANT LIGHT LED OPERATING AT 3W, 48 VDC INPUT. DELIVERING OUT STANDING PERFORMANCE OF 330 LM.**


## Technical description

Magnetic pendant 35 luminaire adjustable spotlight with adapter for installation on 48V low voltage track. Integrated «power line» technology allows each spotlight on the track to be adjusted separately. Body material is extruded aluminium and diffuser is PMMA and beam angle is 42° (15°, 24° and 36° just for options). Quick installation system on the track using magnets. Class I electrical, IP43 (IP44 only for option). Total power: 3w. (DALI control an option only). LED color temperature is 3000-6000 kelvin. Chromaticity tolerance (initial MacAdam: 3). Color rendering Ra > 80.




## Application

- Decorative
- Art gallery
- Hotel
- Office
- House

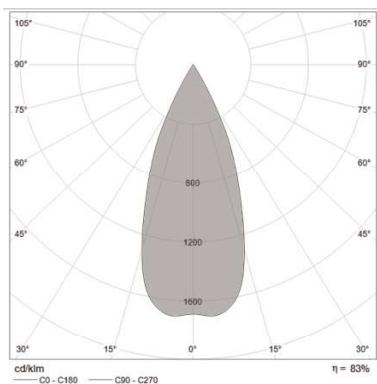

Correlated color temperature: 3000-6000 kelvin  
Rated median useful life: 50000h L70 at 25°C  
Luminaire input power: 3w

Dimensions: Ø35 x 300 mm  
Total power: 3w  
Luminaire luminous flux: 330 lm  
Luminaire efficacy: 110 lm/w  
Weight: 0.5 kg

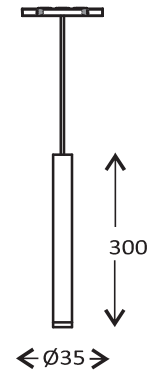

## Mounting and installation

Quick installation system on the magnetar track using magnets, that embeded in luminaire .

Options:

