

MAGNETAR PENDANT 65

LED_Low voltage family

IP20

IK05



T_a25



THE FAMILY OF MAGNETAR PENDANT LED OPERATING AT 15W, 48 VDC INPUT. DELIVERING OUTSTANDING PERFORMANCE OF 1650LM/M.


Technical description

Magnetar pendant 65 luminaire adjustable spotlight with adapter for installation on 48V low voltage track. Integrated «power line» technology allows each spotlight on the track to be adjusted separately. Body material is extruded aluminum. Quick installation system on the track using magnets. Class I electrical, IP20 (IP44 only for option). Total power: 15w. (DALI control an option only). LED color temperature is 3000-6000 kelvin. Chromaticity tolerance (initial Macadam: 3). Color rendering Ra>80.




Application

- Decorative
- Art gallery
- Hotel
- Office
- House

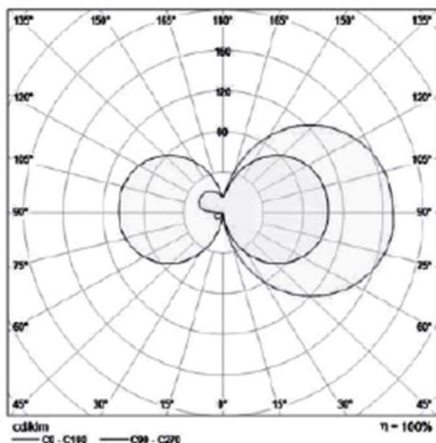

Correlated color temperature: 3000-6000 kelvin
Rated median useful life: 50000h L70 at 25°C
Luminaire input power: 15 w

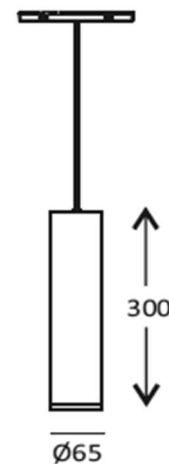

Dimensions: Ø65 x 300 mm
Total power: 15 w
Luminaire luminous flux: 1650 lm
Luminaire efficacy: 110 lm/w
Weight: 0.5 kg

Mounting and installation

Quick installation system on the magnetar track using magnets, that embedded in luminaire.