



## MAGNETAR ROTATE LINEAR

THE FAMILY OF MAGNETIC PENDANT LIGHT LED 48VDC INPUT.



# MAGNETAR ROTATE LINEAR

**AREND**  
INVESTING IN LIGHT

LED_Low voltage family	IP43	IK05	LED		T <sub>a</sub> 25	5			-	
------------------------	------	------	-----	--	-------------------	---	--	--	---	--

**THE FAMILY OF MAGNETAR ROTATE LINEAR LED OPERATING AT 12W, 48 VDC INPUT.DELIVERING OUT STANDING PERFORMANCE OF 1200LM/M.**


## Technical description

Magnetic track rotate linear luminaire makes an impact with their streamlined design and generate base lighting that illuminates objects and rooms especially evenly. Body material is extruded aluminium and diffuser is polycarbonate. Quick installation system on the track using magnets. Class I electrical, IP43 (IP44 only for option). Total power: 12 w.(DALI control an option only). LED color temperature is 3000 - 6000kelvin. Chromaticity tolerance(initial MacAdam:3). Color rendering Ra>80.




## Application

- Decorative
- Art gallery
- Hotel
- Office
- House

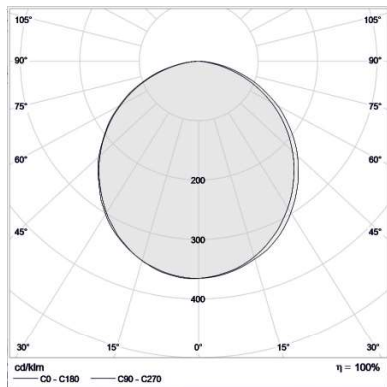

Correlated color temperature: 3000 - 6000 kelvin  
Rated median useful life: 50000h L70 at 25°C Luminaire  
input power:12 w

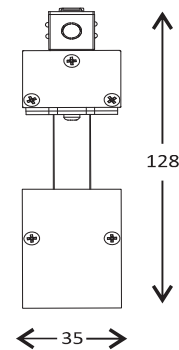

Dimensions: 400 x 35 x 128 mm  
Total power: 12 w  
Luminaire luminous flux: 1200 lm  
Luminaire efficacy: 100 lm/w  
Weight: 0.8 kg

## Mounting and installation

Quick installation system on the magnetar track using magnets, that embeded in luminaire .

Options:

Body:

