

MAGNETAR SPOT LINEAR

LED_Low voltage family IP20 IK05   $T_a 25$    

The Family of Magnetar Spot Linear LED Operating at 12 w, 48 VDC input. Delivering outstanding performance of 1200 lm.

Technical description

Magnetic track linear luminaire makes an impact with their streamlined design and generate base lighting that illuminate's objects and rooms especially evenly. Body material is extruded aluminum and eye light is machined aluminum and diffuser is polystyrene. Quick installation system on the track using magnets. Class I electrical, IP20 (IP44 only for option). Total power: 12 w.



(DALI control an option only). LED color temperature is 3000–6000 kelvin. Chromaticity tolerance(initial MacAdam:3).Color rendering $R_a > 80$.

This product can be produced in 2 ,4 ,6 House.



Application

- Decorative •
- Art gallery •
- Hotel •
- Office •
- House •

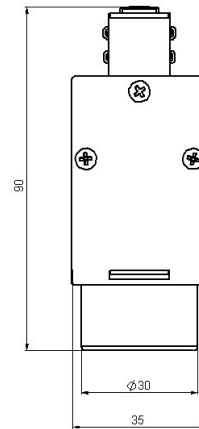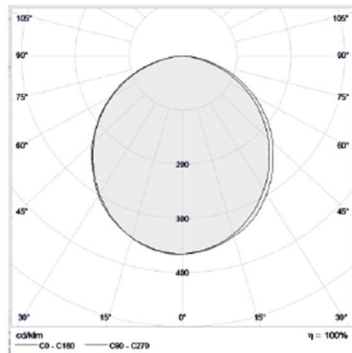

Correlated color temperature: 3000 – 6000 kelvin
Rated median useful life: 50000h L70 at 25°C
Luminaire input power: 12w

Dimensions: 35 x 90 x 178 mm (90 , 265 mm)
Total power: 12 w (6 , 18w)
Luminaire luminous flux: 1200 lm (600 , 1800lm)
Luminaire efficacy: 100 lm/w
Weight: 1.4 kg

Mounting and installation

Quick installation system on the magnetar track using magnets, that embedded in luminaire