

MAGNETAR SPOT 65

LED_Low voltage family IP20 IK05



T_a25



THE FAMILY OF MAGNETAR SPOT LIGHT LED OPERATING AT 15W, 48 VDC INPUT. DELIVERING OUT STANDING PERFORMANCE OF 1650LM.


Technical description

Magnetar spot 65 luminaire adjustable spotlight with adapter for installation on 48V low voltage track. Integrated «power line» technology allows each spotlight on the track to be adjusted separately. Body material is extruded aluminum and diffuser is PMMA and beam angle is 42°. Quick installation system on the track using magnets. Class I electrical, IP20 (IP44 only for option). Total power: 15 w. (DALI control an option only). LED color temperature is 3000-6000 kelvin. Chromaticity tolerance (initial Macadam: 3). Color rendering Ra>80.




Application

- Decorative
- Art gallery
- Hotel
- Office
- House

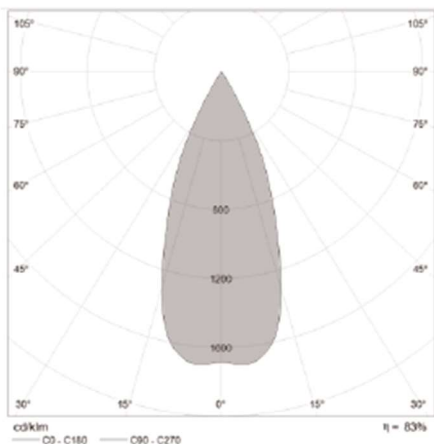

Correlated color temperature: 3000 – 6000 kelvin
Rated median useful life: 50000h L70 at 25°C
Luminaire input power: 15 w

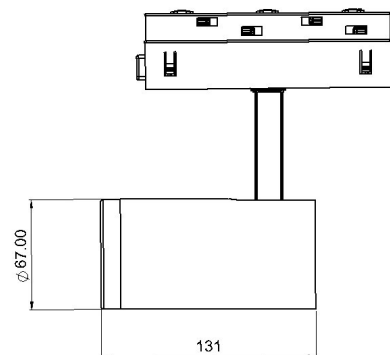

Dimensions: Ø67 x 131 mm
Total power: 15 w
Luminaire luminous flux: 1650 lm
Luminaire efficacy: 110 lm/w
Weight: 0.6 kg

Mounting and installation

Quick installation system on the magnetar track using magnets, that embedded in luminaire.