


MAGNETAR TUBE

THE FAMILY OF MAGNETAR TUBE LIGHT LED 48VDC INPUT.



MAGNETAR TUBE

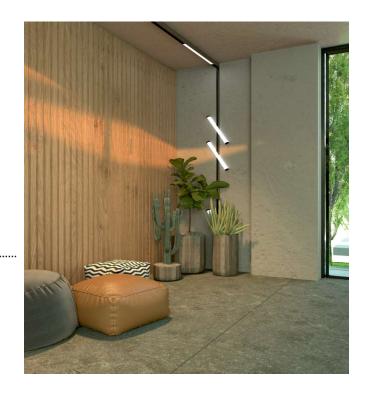

LED_Low voltage family	IP43 II	IK08	⊕ T _a 2	5 /5	(~ (
------------------------	---------	------	--------------------	-------------	----------	--	-----	--

THE FAMILY OF MAGNETAR TUBE LIGHT ,TUBE LED OPERATING AT 10W, 48 VDC INPUT. DELIVERING OUT STANDING PERFORMANCE OF 600 LM..


Technical description

This light can be rotated 350 degrees. Body material is PMMA. Quick installation system on the track using magnets. Class I electrical, IP43. Total power: 10 w. (DALI control an option only). LED color temperature is 3000-6000 kelvin. Chromaticity tolerance (initial MacAdam: 3). Color rendering Ra>80.




Application

- Decorative
- Art gallery
- Hotel
- Office
- House



Correlated color temperature: 3000-6000 kelvin Rated median useful life: 50000h L70 at 25°C

Luminaire input power: 10 w



Dimensions: 400 x Ø40 mm

Total power: 10 w

Luminaire luminous flux: 600 lm Luminaire efficacy: 60 lm/w

Weight: 0.45 kg

Mounting and installation

Quick installation system on the track using magnets.

Options:



















