

EMERGENCY EXIT SIGN

Emergency Family IP20 IK05  LED  $T_a 25$  5   

THE FAMILY OF SURFACE MOUNT AND PENDANT OPERATING AT 4W, 220-240 VAC INPUT.


Technical description

Surface and pendant mount emergency system for indoor general lighting. for cases where providing emergency lighting with appropriate light intensity and long duration during power outage by showing the way out is the main criteria for choosing this lamp. Luminaire for indoor architectural linear lighting with LED color temperature is 4000 kelvins with a 3 hours' battery and non-maintained electronic converter for exit route. Body material is extruded aluminum, with white electrostatic powder paint. Class I electrical and IP20 with plug and play connector. Total power: 4w
Chromaticity tolerance (initial Macadam: 3). Color rendering $R_a > 80$.




Application

- Corridors
- Office
- General
- Parking

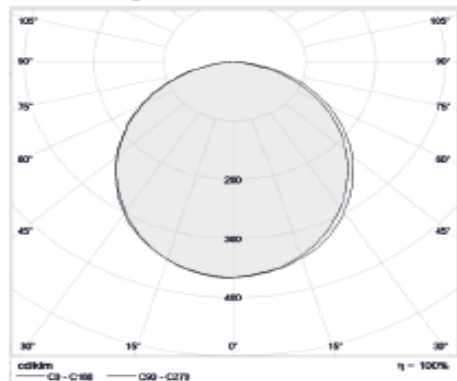

Correlated color temperature: 3000 – 6000 kelvin
Rated median useful life: 50000h L70 at 25°C Luminaire
input power: 4 w

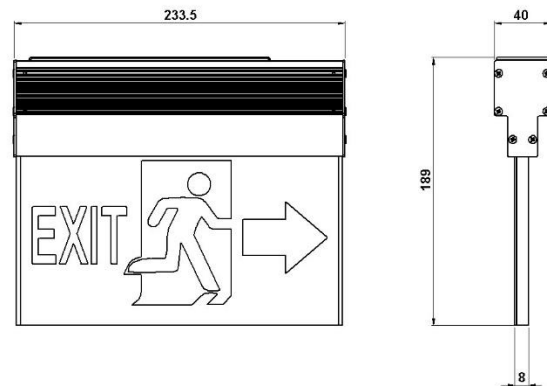

Dimensions: 233.5 x 189 x 40 mm
Total power: 4 w
Luminaire luminous flux: -
Luminaire efficacy: -
Weight: 0.7 kg

Installation and Mounting

Surface and pendant mounting with special accessories to be ordered